



THERMODYNE
Enhancing Energy Efficiency

SAVEMAX

Oil & Gas Fired Boiler




IBR
1950





Technical Features

Boiler Type	3 Pass Fully-wet back Boiler
Max. Working Pressure	10.54-28.12 Kg/cm ² (g)
Boiler efficiency	90 ± 2 %
Mode of firing	Automatic through Monoblock Burner
Power Supply	AC, 3 Ph, 415V, 50 Hz, 4-Wire System
Design code	IBR 1950 with Latest ammendments
Dryness fraction	98%
Outlet Steam condition	Dry, Saturated
Capacity Range	1- 20 TPH
Fuel Options	LDO, PNG, LPG, Biogas, Dual Fuel (LDO with PNG/LPG)

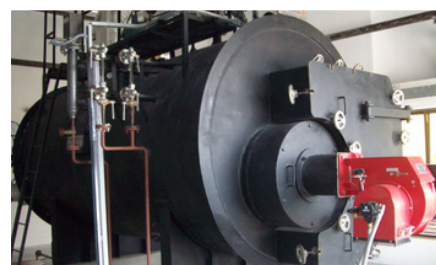

THERMODYNE ENGINEERING SYSTEMS

📍 A-7/110 SSGT Road Industrial Area, Ghaziabad, UP-201009 (INDIA)

📍 E-11 South East Zone MIA Alwar - Rajasthan-301030 (INDIA)

✉ sales@thermodyneboilers.com

🌐 www.thermodyneboilers.com

☎ +91 9990226006